

Two Great High Performance Thermally Broken WinDow Choices



Casement & Awning WinDows

WinDoor
INCORPORATED

Energy Efficient WinDows

Perfect for high-rise capabilities or suitable for the private residential application.

The Possibilities Are Endless...



The High Performance Aluminum Casement WinDow

9060 Series

Impact Or Non-Impact

BIG Max Size:

Single vent 37" x 84"

Dp's Up To +100/-140

Twin 74" x 72"

Dp's Up To +90/-90



Our Casement WinDow has the beauty and strength of a contemporary design along with heavy-duty capabilities that WinDoor Products are expected to achieve.



The High Performance Aluminum

Awning WinDow

9066 Series

Impact Or Non-Impact

BIG Max Size:

Single Vent 54" x 36"

DP's Up To +100/-120

Twin Vent 108" x 36"

DP's Up To +100/-100

Awning windows operate similar to casements, but swing upward to provide ventilation where a limited opening is required or a horizontal appearance is desired.



Handle Options

Our stylish, fold-down handle offers a contemporary look with less interference with window treatments. While the easy to use Single-lever multi-point locking system provides a tight closer. Hardware Finishes: White / Black and Gray for clear anodized



Color Options

We can even custom paint/matched to the color of any décor, or offer you our Two-Tone Option... Two different colors Inside & Out! Or choose from our **WoodGrain** options.



www.WinDoorInc.com

See other side for more details

Our Thermally Broken Aluminum Casement & Awning WinDow offer a traditional look that is perfect for high-rise capabilities or suitable for the private residential application. Comes complete with our matching frame design and triple weather-stripping for protection against the elements.

Casement WinDow Series 9060


Vertical Cross Sections

Awning WinDow Series 9066




CASEMENTS

Square Glass Stops
Are Available



EXTERIOR

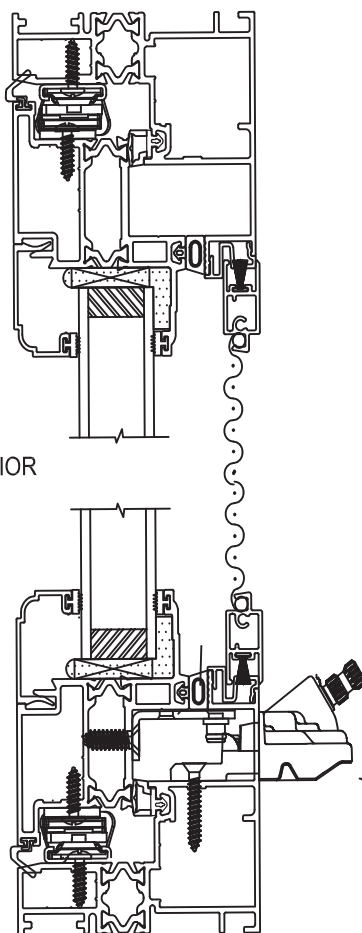

At - A - Glance

Single vent 37" x 84"

Design Pressures Up-To +120 / - 150

Twin 74" x 72"

Design Pressures Up-To +100 / - 120

Water Performance 20 psf

U-Value as low as .36 / SHGC as Low as .14


Casement Hardware	Width	Minimum & Maximum
Single Vent w/ Washability	19"	Tested 37"
Twin Vent w/ Washability	37.5"	Tested 74"
Single Vent w/ Egress	20.75"	Tested 37"
Twin Vent w/ Egress	40.75"	Tested 74"

Single Height Limits	19"	Tested 84"
Twin Height Limits	19"	Tested 72"




AWNINGS

Square Glass Stops
Are Available



EXTERIOR

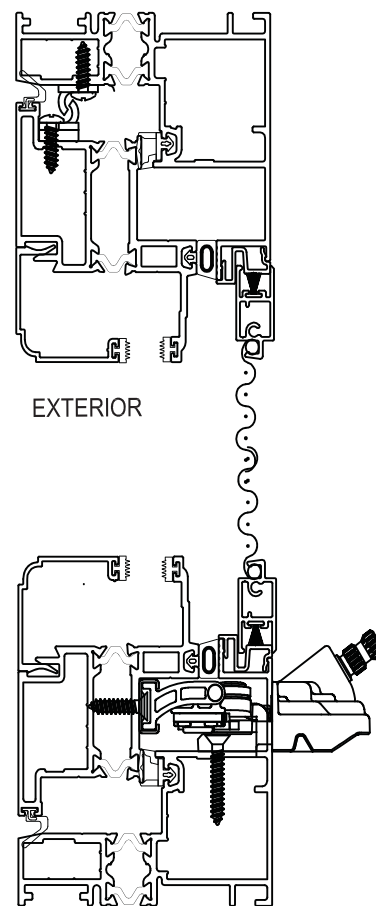

At - A - Glance

Single Vent 54" x 36"

Design Pressures Up-To +100 / - 150

Twin Vent 108" x 36"

Design Pressures Up-To +100 / - 150

Water Performance 20 psf

U-Value as low as .36 / SHGC as Low as .14

Awning	Width	Minimum & Maximum
Single Vent	21.75	Tested 54"
Twin Vent	42.75"	Tested 108"

Single Height Limits	19"	Tested 36"
Twin Height Limits	19"	Tested 36"

Tested Tuff...

